

# XA 4Y.A.KO Mass Comparator

Professional manual mass comparators of the highest class.



XA 4Y.A.KO



Fully automatic balance levelling



Automatic door



Open-work weighing pan



Weighing-chamber-integrated antistatic ionizer

## Functions

- 

Mass comparator
- 

Ambient conditions measurement
- 

Proximity sensors
- 

Replaceable units
- 

Multilingual menu
- 

Autotest
- 

Automatic sliding door

## Features

### Effective and Excellent Measurement

Professional XA 4Y.A.KO manual mass comparators enable comparison of 100 mg - 200 g weights of class E1, and 1 mg - 200 g weights of class E2 and lower.

### Maximum Comfort of Operation

The mass comparator is equipped with aesthetic and spacious anti-draft chamber with automatic door. The open-work weighing pan reduces the influence of ambient conditions on carried out measurement.

### Dedicated Software

Specially designed RMCS computer software enables comprehensive realisation of calibration procedures in laboratory. The system manages the whole calibration process, starting from the moment the order is placed, through procedure performance, to the moment of issuing the calibration certificate.

\* Anti-draft shield does not come standard with the mass comparator.

## Technical Specifications

	XA 6.4Y.A.KO	XA 21.4Y.A.KO	XA 52.4Y.A.KO
OIML calibration range E1	100 mg ÷ 5 g	500 mg ÷ 20 g	50 g
OIML calibration range E2	1 mg ÷ 5 g	1 mg ÷ 20 g	100 mg ÷ 50 g
OIML calibration range F1	1 mg ÷ 5 g	1 mg ÷ 20 g	1 mg ÷ 50 g
OIML calibration range F2	1 mg ÷ 5 g	1 mg ÷ 20 g	1 mg ÷ 50 g
OIML calibration range M1	1 mg ÷ 5 g	1 mg ÷ 20 g	1 mg ÷ 50 g
OIML calibration range M2	1 mg ÷ 5 g	1 mg ÷ 20 g	1 mg ÷ 50 g
Maximum capacity [Max]	6 g	21 g	52 g
Readability [d]	0.001 mg	0.001 mg	0.005 mg
Standard repeatability [5% Max]*	0.0012 mg	0.0012 mg	0.0025 mg
Standard repeatability [Max] *	0.002 mg	0.003 mg	0.006 mg
Permissible repeatability *	0.003 mg	0.005 mg	0.01 mg
Stabilization time	5 s	5 s	5 s
Adjustment	internal	internal	internal
Electric compensation range	0 g ÷ 6 g	0 g ÷ 21 g	0 g ÷ 52 g
Eccentricity (for test weight)	1 d / 1 mm	1 d / 1 mm	1 d / 1 mm
Display	5.7" colour resistive touch screen	5.7" colour resistive touch screen	5.7" colour resistive touch screen
Keypad	8 keys	8 keys	8 keys
Ingress protection - indicator	IP 43	IP 43	IP 43
Touch-free operation	2 programmable sensors	2 programmable sensors	2 programmable sensors
USB-A	2	2	2
Ethernet	10 / 100 Mbit	10 / 100 Mbit	10 / 100 Mbit
RS 232	2	2	2
Wi-Fi®	802.11 b/g/n	802.11 b/g/n	802.11 b/g/n
IN/OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT
Power supply	110 ÷ 230 V AC / 50 ÷ 60 Hz	110 ÷ 230 V AC / 50 ÷ 60 Hz	110 ÷ 230 V AC / 50 ÷ 60 Hz
Operating temperature	+15 ÷ +35 °C	+15 ÷ +35 °C	+15 ÷ +35 °C
Operating temperature change rate	±1°C / 12 h	±1°C / 12 h	±1°C / 12 h
Relative humidity variations	±5% / 4 h	±5% / 4 h	±5% / 4 h
Relative humidity***	40 ÷ 70%	40 ÷ 70%	40 ÷ 70%
Transport and storage temperature	-20 ÷ +50 °C	-20 ÷ +50 °C	-20 ÷ +50 °C
Weighing pan dimensions	Ø 16 mm	Ø 24 mm	Ø 24 mm
Mass comparator dimensions**	564 × 253 × 300 mm	564 × 253 × 300 mm	564 × 253 × 300 mm
Indicator dimensions**	206 × 140 × 70 mm	206 × 140 × 70 mm	206 × 140 × 70 mm
Mass comparator net weight	14,7 kg	14,7 kg	14,7 kg
Mass comparator gross weight	19,1 kg	19,1 kg	19,1 kg
Mass comparator packaging dimensions**	720 × 385 × 485 mm	720 × 385 × 485 mm	720 × 385 × 485 mm

\* repeatability is expressed as a standard deviation determined for 6 ABBA cycles

\*\* dimensions: length x width x depth

\*\*\* non-condensing conditions

Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

# Technical Specifications

		<b>XA 200.4Y.A.KO</b>
OIML calibration range E1		200 g
OIML calibration range E2		50 g ÷ 200 g
OIML calibration range F1		50 mg ÷ 200 g
OIML calibration range F2		1 mg ÷ 200 g
OIML calibration range M1		1 mg ÷ 200 g
OIML calibration range M2		1 mg ÷ 200 g
Maximum capacity [Max]		210 g
Readability [d]		0.01 mg
Standard repeatability [5% Max]*		0.005 mg
Standard repeatability [Max] *		0.025 mg
Permissible repeatability *		0.05 mg
Stabilization time		5 s
Adjustment		internal
Electric compensation range		0 g ÷ 210 g
Eccentricity (for test weight)		1 d / 1 mm
Display		5.7" colour resistive touch screen
Keypad		8 keys
Ingress protection - indicator		IP 43
Touch-free operation		2 programmable sensors
USB-A		2
Ethernet		10 / 100 Mbit
RS 232		2
Wi-Fi®		802.11 b/g/n
IN/OUT		4 × IN, 4 × OUT
Power supply		110 ÷ 230 V AC / 50 ÷ 60 Hz
Operating temperature		+15 ÷ +35 °C
Operating temperature change rate		±1°C / 12 h
Relative humidity variations		±5% / 4 h
Relative humidity***		40 ÷ 70%
Transport and storage temperature		-20 ÷ +50 °C
Weighing pan dimensions		Ø 90 mm
Mass comparator dimensions**		564 × 253 × 300 mm
Indicator dimensions**		206 × 140 × 70 mm
Mass comparator net weight		14,7 kg
Mass comparator gross weight		19,1 kg
Mass comparator packaging dimensions**		720 × 385 × 485 mm

\* repeatability is expressed as a standard deviation determined for 6 ABBA cycles


\*\* dimensions: length x width x depth

\*\*\* non-condensing conditions

Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

## Dimensions

---

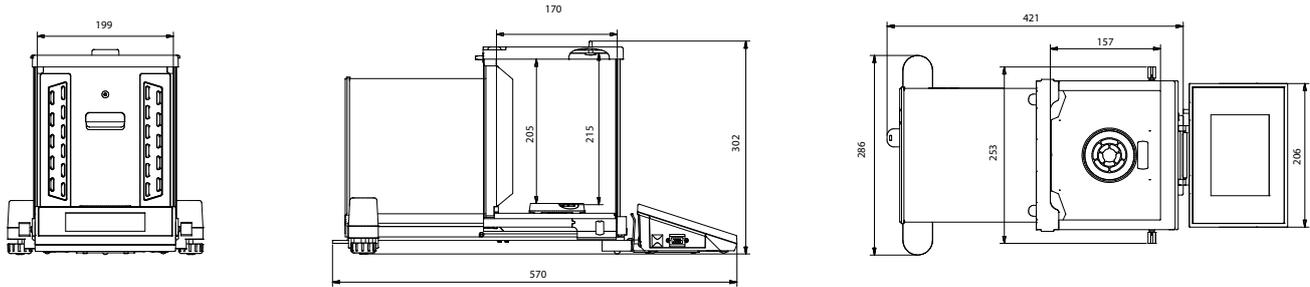

XA 4Y.A.KO

---

## Accessories

---

### Weighing Tables

- granite anti-vibration table
- anti-vibration table for laboratory balances
- professional weighing table

### Ambient Conditions

- THB-S or THB-P sensor

### Peripheral Devices

- Epson dot matrix printer
- barcode scanner
- WD-5/3Y LCD display (backlit)

### Cables, Converters

- RS-232 – P0108 computer cable
- RS-232 – P0167 computer cable
- RS-232 – P0151 Epson printer cable

### Electrical Accessories

- power supply with ZR-02 battery

## Dedicated Software

---

### RMCS System

- performance of calibration procedures in a laboratory from the moment the order is placed, to the moment of issuing a calibration certificate
- compatible with THB sensors enabling recording ambient conditions
- export of report results to various files
- archiving calibration protocols, orders, certificates and ambient conditions

### RADWAG Remote Desktop

- remote control of the mass comparator using computer, telephone or tablet
- sending text messages
- version for Windows 10 and Android systems

### R-LAB

- collecting measurements
- carrying out statistical analysis of measurements
- customized graphs and reports

### Parameters Editor

- remote change of parameters
- remote on-line preview of the display
- displaying current mass indication
- software update
- file loading, editing and saving parameters to a file
- import and export of parameters
- interfaces: RS232, Ethernet and Wireless Connection
- quick and easy edition of balance parameters using computer